

GENERAL INFORMATION

Project Name: _____

OPTIONS AND ACCESSORIES

SWITCH OPTIONS

- Remote Infinite (Standard)
- Remote Toggle Switch
- Indicator Light
- Internal Control

SWITCH OPTIONS

- Right Side
- Left Side


COLOR

- Steel Gray Pearl

Helios lights and warmers ship unassembled and require mounting and wiring at time of installation. Contact BSI for details.

INFORMATION FOR LED BULB

Temperature	3000K
Average Rated Life (hr):	50,000
Color Rendering Index (CRI)	90
Diodes	50 per foot
Electrical	110-250V
Frequency	50/60Hz
Amp Per Foot @ 110V	0.04
Watts Per Foot	5

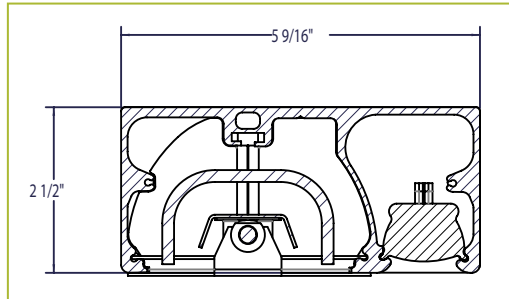


Helios Housing Side Cutaway Diagram


MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705E-120-18	24"	120 (120)	50/60Hz	2.96	357
705E-120-24	30"	120 (120)	50/60Hz	4.28	510
705E-120-30	36"	120 (120)	50/60Hz	5.60	672
705E-120-36	42"	120 (120)	50/60Hz	6.83	815
705E-120-42	48"	120 (120)	50/60Hz	8.04	967
705E-120-48	54"	120 (120)	50/60Hz	9.37	1120
705E-120-54	60"	120 (120)	50/60Hz	10.58	1272
705E-120-60	66"	120 (120)	50/60Hz	11.91	1425
705E-120-66	72"	120 (120)	50/60Hz	13.2	1587
705E-120-72	78"	NOT AVAILABLE IN 120 VOLTS			

705E

Helios® Light & Warmer Combo

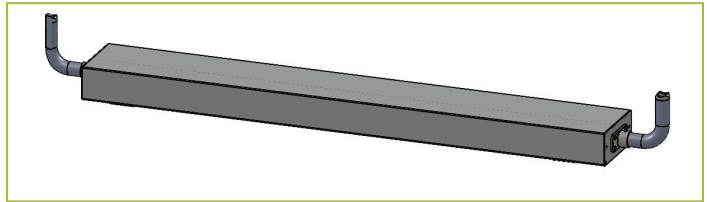

Helios unit shown with mounting for BSI E-Series food guard

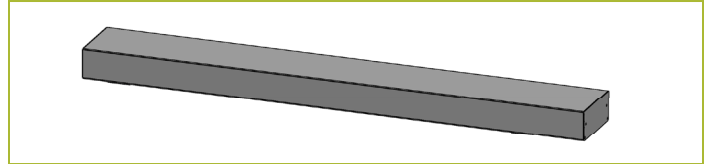

Housing is screwed directly to thickwall tubing guard. Contact factory for other mounting options.

TABLES SHOWN WITH STANDARD LED LIGHT POWER REQUIREMENTS.

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705E-208-18	24"	NOT AVAILABLE IN 208 VOLTS			
705E-208-24	30"	208 (120)	50/60Hz	2.45	510
705E-208-30	36"	208 (120)	50/60Hz	3.26	672
705E-208-36	42"	208 (120)	50/60Hz	3.97	815
705E-208-42	48"	208 (120)	50/60Hz	4.68	967
705E-208-48	54"	208 (120)	50/60Hz	5.40	1120
705E-208-54	60"	208 (120)	50/60Hz	6.11	1272
705E-208-60	66"	208 (120)	50/60Hz	6.82	1425
705E-208-66	72"	208 (120)	50/60Hz	7.63	1587
705E-208-72	78"	208 (120)	50/60Hz	8.44	1755

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705E-240-18	24"	NOT AVAILABLE IN 240 VOLTS			
705E-240-24	30"	240 (120)	50/60Hz	2.14	510
705E-240-30	36"	240 (120)	50/60Hz	2.85	672
705E-240-36	42"	240 (120)	50/60Hz	3.36	815
705E-240-42	48"	240 (120)	50/60Hz	3.97	967
705E-240-48	54"	240 (120)	50/60Hz	4.68	1120
705E-240-54	60"	240 (120)	50/60Hz	5.29	1272
705E-240-60	66"	240 (120)	50/60Hz	5.90	1425
705E-240-66	72"	240 (120)	50/60Hz	6.61	1587
705E-240-72	78"	240 (120)	50/60Hz	7.33	1755

Volts shown as element voltage (light voltage)

